IRIS PRIME SEATING





FEATURES AND BENEFITS

FIXED OR LOUNGER VERSION

For backrest recline

NO-SAG SPRINGS

to reinforce lumbar support and bearing capacity.

LUXURY UPHOLSTERY

Exchangeable covers, no staples or glue needed. Ease of installation as your crew can put them once all seats are placed. Easy numbering identification.

ANCHORING

Standard fixed or riser mounted for an easier cleaning

FLAMMABILITY

Compliance with California Technical Bulletin 117 (TB 117) and Crib 5 on some upholstery references

ACCESSIBILITY

2% of seats that comply with the ADA standard

ATTIC STOCK

2% critical components for on-site inventory

FLEXIBILITY

24 "- 27" widths



ACCESSORIES

NUMBERING AND LETTERING

By seat or by row, plastic, lightened or embroidered.

FIXED OR SWIVEL TABLES

Wide range of swivel tables with integrated cupholders. Full sized to maximize concession sales

UPHOLSTERED ARMRESTS

Fixed or retractable for ADA access

3D HEADREST EFFECT

For a cushy head supportwith an option of embroidered logos.

PRIVACY PANELS


For social distancing purposes. Easily installed (or retroffited) and removed.

DECORATIVE STITCHING

To enhance looks

FALSE FOOT-REST

To give it a more luxurious appearance



TECHNICAL SPECIFICATIONS

STRUCTURE

- · Structural frame made of high quality CR round steel tubing, 18 gauge, of 1" (25mm) diameter
- · No-Sag springs to reinforce lumbar support and bearing capacity of the cushion.
- Panel made of triplex of 5/8 (15mm), and reinforced with internal metal plates made of 14-gauge CR steel.

MECHANISM

- · Lounger mechanism includes a reclining shock absorber, made of 65SHORE-A hardness rubber.
- · Metal structural components in 11 gauge HR sheet steel, and 1020 steel bushings.
- · A fixed back option is available

BACKREST AND SEAT

- · Backrest and seat molded in cold-injected polyurethane foam, and upholstered in vinyl.
- · Covers injected in black high impact polypropylene

MOLDED FOAM

STANDARD

LUXURY FIRM FOAM

Density

Back 40 - 45 Kg/m3 Cushion 45 - 50 Kg/m3


Hardness

Back 3.4 - 4.4 Kg/f Cushion 3.9 - 4.3 Kg/f Density


Back 40 - 45 Kg/m3 Cushion 45 - 50 Kg/m3

Hardness

Back 3.6 - 4.6 Kg/f Cushion 3.9 - 4.9 Kg/f

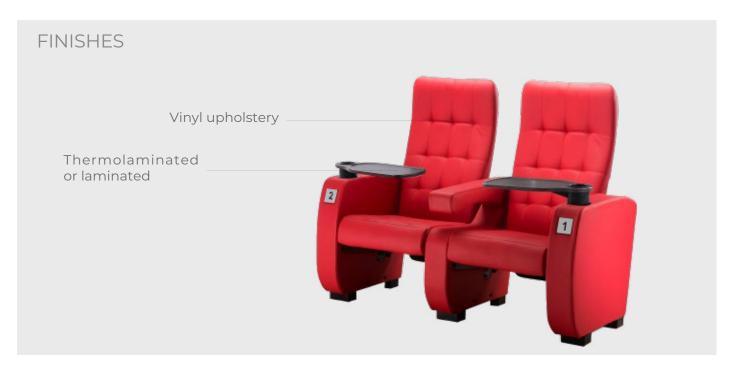



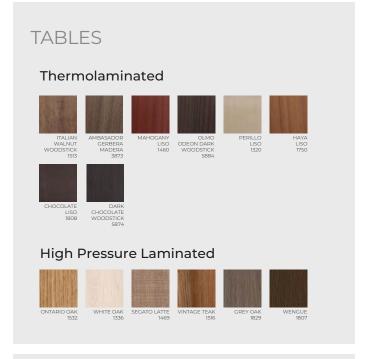



*A wide range og finishes is available. Please ask for the entire finish guide.