

BALI

PRIME SEATING



TECHNICAL SPECIFICATIONS

FEATURES AND BENEFITS

FIXED OR LOUNGER VERSION

For backrest recline

NO-SAG SPRINGS

to reinforce lumbar support and bearing capacity.

LUXURY UPHOLSTERY

Exchangeable covers, no staples or glue needed. Ease of installation as your crew can put them once all seats are placed. Easy numbering identification.

ANCHORING

Standard fixed or riser mounted for an easier cleaning

FLAMMABILITY

Compliance with California Technical Bulletin 117 (TB 117) and Crib 5 on some upholstery references

ACCESSIBILITY

2% of seats that comply with the ADA standard

ATTIC STOCK

2% critical components for on-site inventory

FLEXIBILITY

25" - 27" widths



ACCESSORIES

NUMBERING AND LETTERING

By seat or by row, plastic, lightened or embroidered.

FIXED OR SWIVEL TABLES

Wide range of swivel tables with integrated cupholders. Full sized to maximize concession sales

UPHOLSTERED ARMRESTS

Fixed or retractable for ADA access

3D HEADREST EFFECT

For a cushy head support with an option of embroidered logos.

PRIVACY PANELS

For social distancing purposes. Easily installed (or retrofitted) and removed.

DECORATIVE STITCHING

To enhance looks



FALSE FOOT-REST

To give it a more luxurious appearance

ULTRA COMPACT VERSION

Folding cushion for reduced platforms

ACCESSORIES

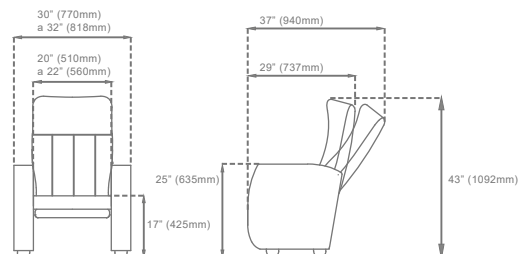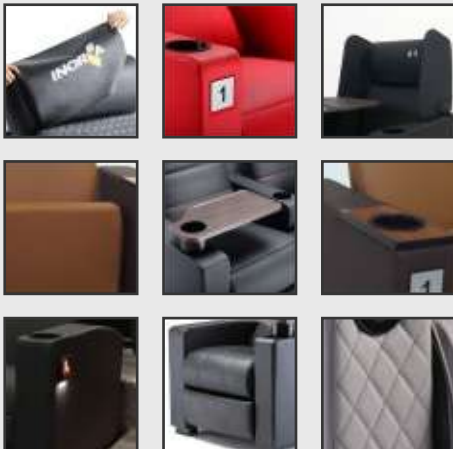

TECHNICAL SPECIFICATIONS

STRUCTURE

- Structural frame made of high quality CR round steel tubing, 18 gauge, of 1" (25mm) diameter
- No-Sag springs to reinforce lumbar support and bearing capacity of the cushion.
- Panel made of triplex of 5/8 (15mm), and reinforced with internal metal plates made of 14-gauge CR steel.

MECHANISM

- Lounger mechanism includes a reclining shock absorber, made of 65SHORE-A hardness rubber.
- Metal structural components in 11 gauge HR sheet steel, and 1020 steel bushings.
- The ultra compact version includes a counterbalanced mechanism that is maintenance-free and noiseless. Pivot includes an axle of 1/2" (12mm) diameter AISI 1020 steel, with a stamped 8-gauge steel sheet internal pivot stop. Seat pivots bushings are made in Nylon 6.6, and are attached to the seat by steel screws.
- A fixed back option is available

BACKREST AND SEAT

- Backrest and seat molded in cold-injected polyurethane foam, and upholstered in vinyl.

MOLDED FOAM

STANDARD

Density

Back 40 - 45 Kg/m³

Cushion 45 - 50 Kg/m³

Hardness

Back 3.4 - 4.4 Kg/f

Cushion 3.9 - 4.3 Kg/f

LUXURY FIRM FOAM

Density

Back 40 - 45 Kg/m³

Cushion 45 - 50 Kg/m³

Hardness

Back 3.6 - 4.6 Kg/f

Cushion 3.9 - 4.9 Kg/f

FINISHES

Vinyl upholstery

Thermolaminated
or laminated



**A wide range of finishes is available. Please ask for the entire finish guide.*

INORCA SAS

Calle 18 #118-85 Avenida Cañasgordas - 54 Cali, Colombia
Tel: +57 2 4896999 - Toll free from USA: +1 786 209 0299 /
www.inorca.com / info@inorca.com.co

BALI cinemas