

# BALI

ULTRA COMPACTA



TECHNICAL SPECIFICATIONS

## FEATURES AND BENEFITS

### FIXED OR LOUNGER VERSION

For backrest recline

### NO-SAG SPRINGS

to reinforce lumbar support and bearing capacity.

### LUXURY UPHOLSTERY

Exchangeable covers, no staples or glue needed. Ease of installation as your crew can put them once all seats are placed. Easy numbering identification.

### ANCHORING

Standard fixed or riser mounted for an easier cleaning

### FLAMMABILITY

Compliance with California Technical Bulletin 117 (TB 117) and Crib 5 on some upholstery references

### ACCESSIBILITY

2% of seats that comply with the ADA standard

### ATTIC STOCK

2% critical components for on-site inventory

### FLEXIBILITY

25" - 27" widths



## ACCESSORIES

### NUMBERING AND LETTERING

By seat or by row, plastic, lightened or embroidered.

### UPHOLSTERED ARMRESTS

Fixed or retractable for ADA access

### 3D HEADREST EFFECT

For a cushy head support with an option of embroidered logos.



### PRIVACY PANELS

For social distancing purposes. Easily installed (or retrofitted) and removed.

### DECORATIVE STITCHING

To enhance looks

## ACCESSORIES

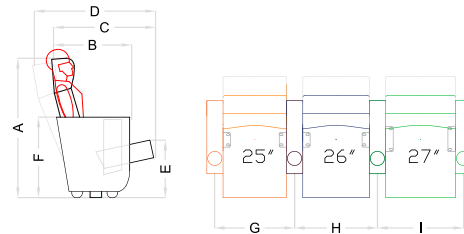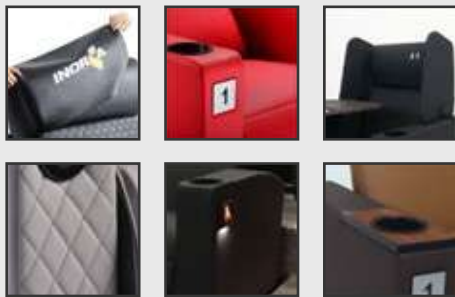

BALI ULTRACOMPACT CHAIR

ITEM	DIMENSIONS POS. 1		DIMENSIONS POS. 2		DIMENSIONS POS. 3	
	mm	INCHES	mm	INCHES	mm	INCHES
A	1118	44.0	1110	43.7	1105	43.5
B	598	23.5	622	24.5	668	26.3
C	788	31.0	812	32.0	878	34.6
D	940	37.0	964	38.0	1030	40.6
E	458	18.0	458	18.0	458	18.0
F	641	25.2	641	25.2	641	25.2
G	635	25.0	635	25.0	635	25.0
H	660	26.0	660	26.0	660	26.0
I	686	27.0	686	27.0	686	27.0

## TECHNICAL SPECIFICATIONS

### STRUCTURE

- Lounger mechanism, backrest, and seat molded with cold-injected polyurethane of 18-20 kgf hardness.
- Structural frame in cold-rolled-steel pipe of 18, 1" caliber.
- Upholstery wood panels, reinforced with cold-rolled steel sheets of 3mm caliber.
- Plastic cupholder
- Plastic, embroidered, or acrylic numbering on rows or chairs.
- Reclining cushion up to 90°

### OPTIONAL EXTRAS

- Embroidered logo
- Love-seat arms
- Lighting at row ending for hall illumination
- Linear installation, for radius or inclinations

### WARRANTY

- 5 years against manufacturing defects

## MOLDED FOAM

### STANDARD



#### Density

*Back 40 - 45 Kg/m<sup>3</sup>*

*Cushion 45 - 50 Kg/m<sup>3</sup>*

#### Hardness

*Back 3.4 - 4.4 Kg/f*

*Cushion 3.9 - 4.3 Kg/f*

#### Density

*Back 40 - 45 Kg/m<sup>3</sup>*

*Cushion 45 - 50 Kg/m<sup>3</sup>*

#### Hardness

*Back 2.9 - 3.6 Kg/f*

*Cushion 3.9 - 4.3 Kg/f*


# FINISHES

Vinyl upholstery




## UPHOLSTERY


### Vinyl - Pranna

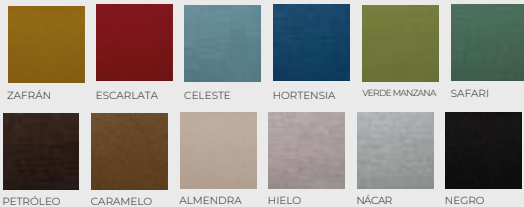

### Vinyl - Valencia




### Vinyl - XtremeSoft Bi-elastic

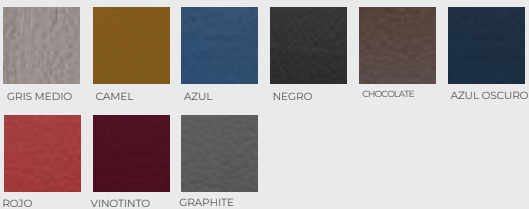


## TABLES

### Thermolaminated

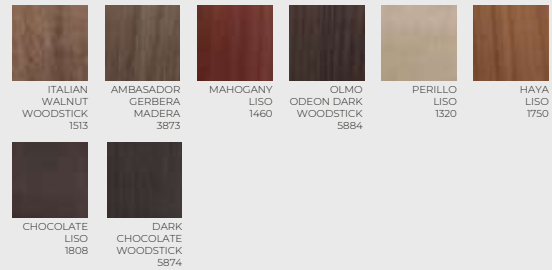

### High Pressure Laminated



## DECORATIVE STITCHING



\*A wide range of finishes is available. Please ask for the entire finish guide.

**INORCA SAS**

Calle 18 #118-85 Avenida Cañasgordas - 54 Cali, Colombia  
 Tel: +57 602 4896999 - Toll free from USA: +1 786 209 0299 /  
[www.inorca.com](http://www.inorca.com) / [info@inorca.com.co](mailto:info@inorca.com.co)

**BALI** cinemas